






Choose Your Slot Die Applicator

	BF MARATHON Slot Die	EquityC Slot Die	EquityC NC Slot Die	APEX Slot Die	Ultra Slot Die
Slot Die Applicator					
Contact vs. Non-Contact	Contact	Contact	Non-Contact	Contact	Contact
Operating Temperature	38°C to 218°C (100°F to 425°F)	38°C to 200°C (100°F to 392°F)	38°C to 200°C (100°F to 392°F)	38°C to 200°C (100°F to 392°F)	38°C to 200°C (100°F to 392°F)
Adhesive Viscosity	100 to 20,000 cps*	100 to 20,000 cps*	5,000 to 80,000 cps**	100 to 20,000 cps*	100 to 30,000 cps*
Application Type	Continuous / Intermittent	Continuous	Continuous	Continuous / Intermittent	Continuous / Intermittent
Max. Coating Width	25 mm (1 in)	900 mm (35.43 in)	900 mm (35.43 in)	500 mm (19.68 in)	300mm (21.7 inch)
Coat Weight Minimum	.5 mil (12 g/m ²)	.5 mil (12 g/m ²)	.5 mil (12 g/m ²)	.5 mil (12 g/m ²)	.21 mil (5 g/m ²)
Cross-Web Accuracy	± 10%	± 10%	± 10%	± 10%	± 10%
Supply Voltage	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz
Dimensions (HxDxW)	99 x 100.5 x 44mm (3.9 x 3.95x 5.1 x 1.73 in)	335 x 150 x 130-930 mm (13.2 x 5.9 x 5.1-36.6 in)	335 x 150 x 175-975 mm (13.2 x 5.9 x 6.9-38.4 in)	241 x 93 x 50-510 mm (9.5 x 3.6 x 1.9-20 in)	146 x 235 x 50-200 mm (5.75 x 9.26 x 1.97-7.87 in)

Note: All above information is dependent on line speed operation and type of adhesive, some results may vary. * Adhesive dependent ** Depending on adhesive rheology


Choose Your Slot Die Applicator

Slot Die Applicator

CrossCoat
High Precision Slot Die




TwinCoat
High Precision Dual Slot Die



Vector
Metered Slot Die



Velocity
Metered Slot Die

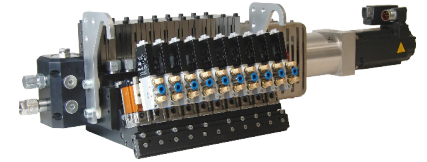

Contact vs. Non-Contact	Non-Contact	Non-Contact	Contact	Contact
Operating Temperature	38°C to 200°C (100°F to 392°F)	38°C to 200°C (100°F to 392°F)	38°C to 218°C (100°F to 425°F)	38°C to 218°C (100°F to 425°F)
Adhesive Viscosity	1,000 to 200,000 cps*	1,000 to 200,000 cps*	500 to 30,000 cps*	500 to 30,000 cps*
Application Type	Continuous	Continuous	Continuous / Intermittent	Continuous / Intermittent
Max. Coating Width	Fix 2,700 mm (106.3 in) Adjust. 1,600 mm (63 in)	2,700 mm (106 in)	900 mm (21.7in)	300 mm (21.7in)
Coat Weight Minimum	.1 mil (3 g/m ²)	.1 mil (3 g/m ²) per side	.5 mil (12 g/m ²)	Please Contact Your Local Sales Representative
Cross-Web Accuracy	± 3%	± 3%	± 1%	± 1%
Supply Voltage	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz	200-240 VAC 1 Phase 50-60Hz
Dimensions (HxDxW)	Fix 800x521x460-3,000 mm (31.5x20.51x18.11-118.11 in) Adjust. 800x521xcustom (31.5x20.51xcustom)	Custom	272 x 222 x 700-1600 mm (10.71 x 8.74 x 27.56-63.03 in)	144-155 x 270 x 539-739 mm (5.66-6.10 x 10.62 x 21.22-29.09 in)

Note: All above information is dependent on line speed operation and type of adhesive, some results may vary. * Adhesive dependent ** Depending on adhesive rheology